


Accessories

Roof Stands, Pallet Forks,
Roof Tile Tongs and more

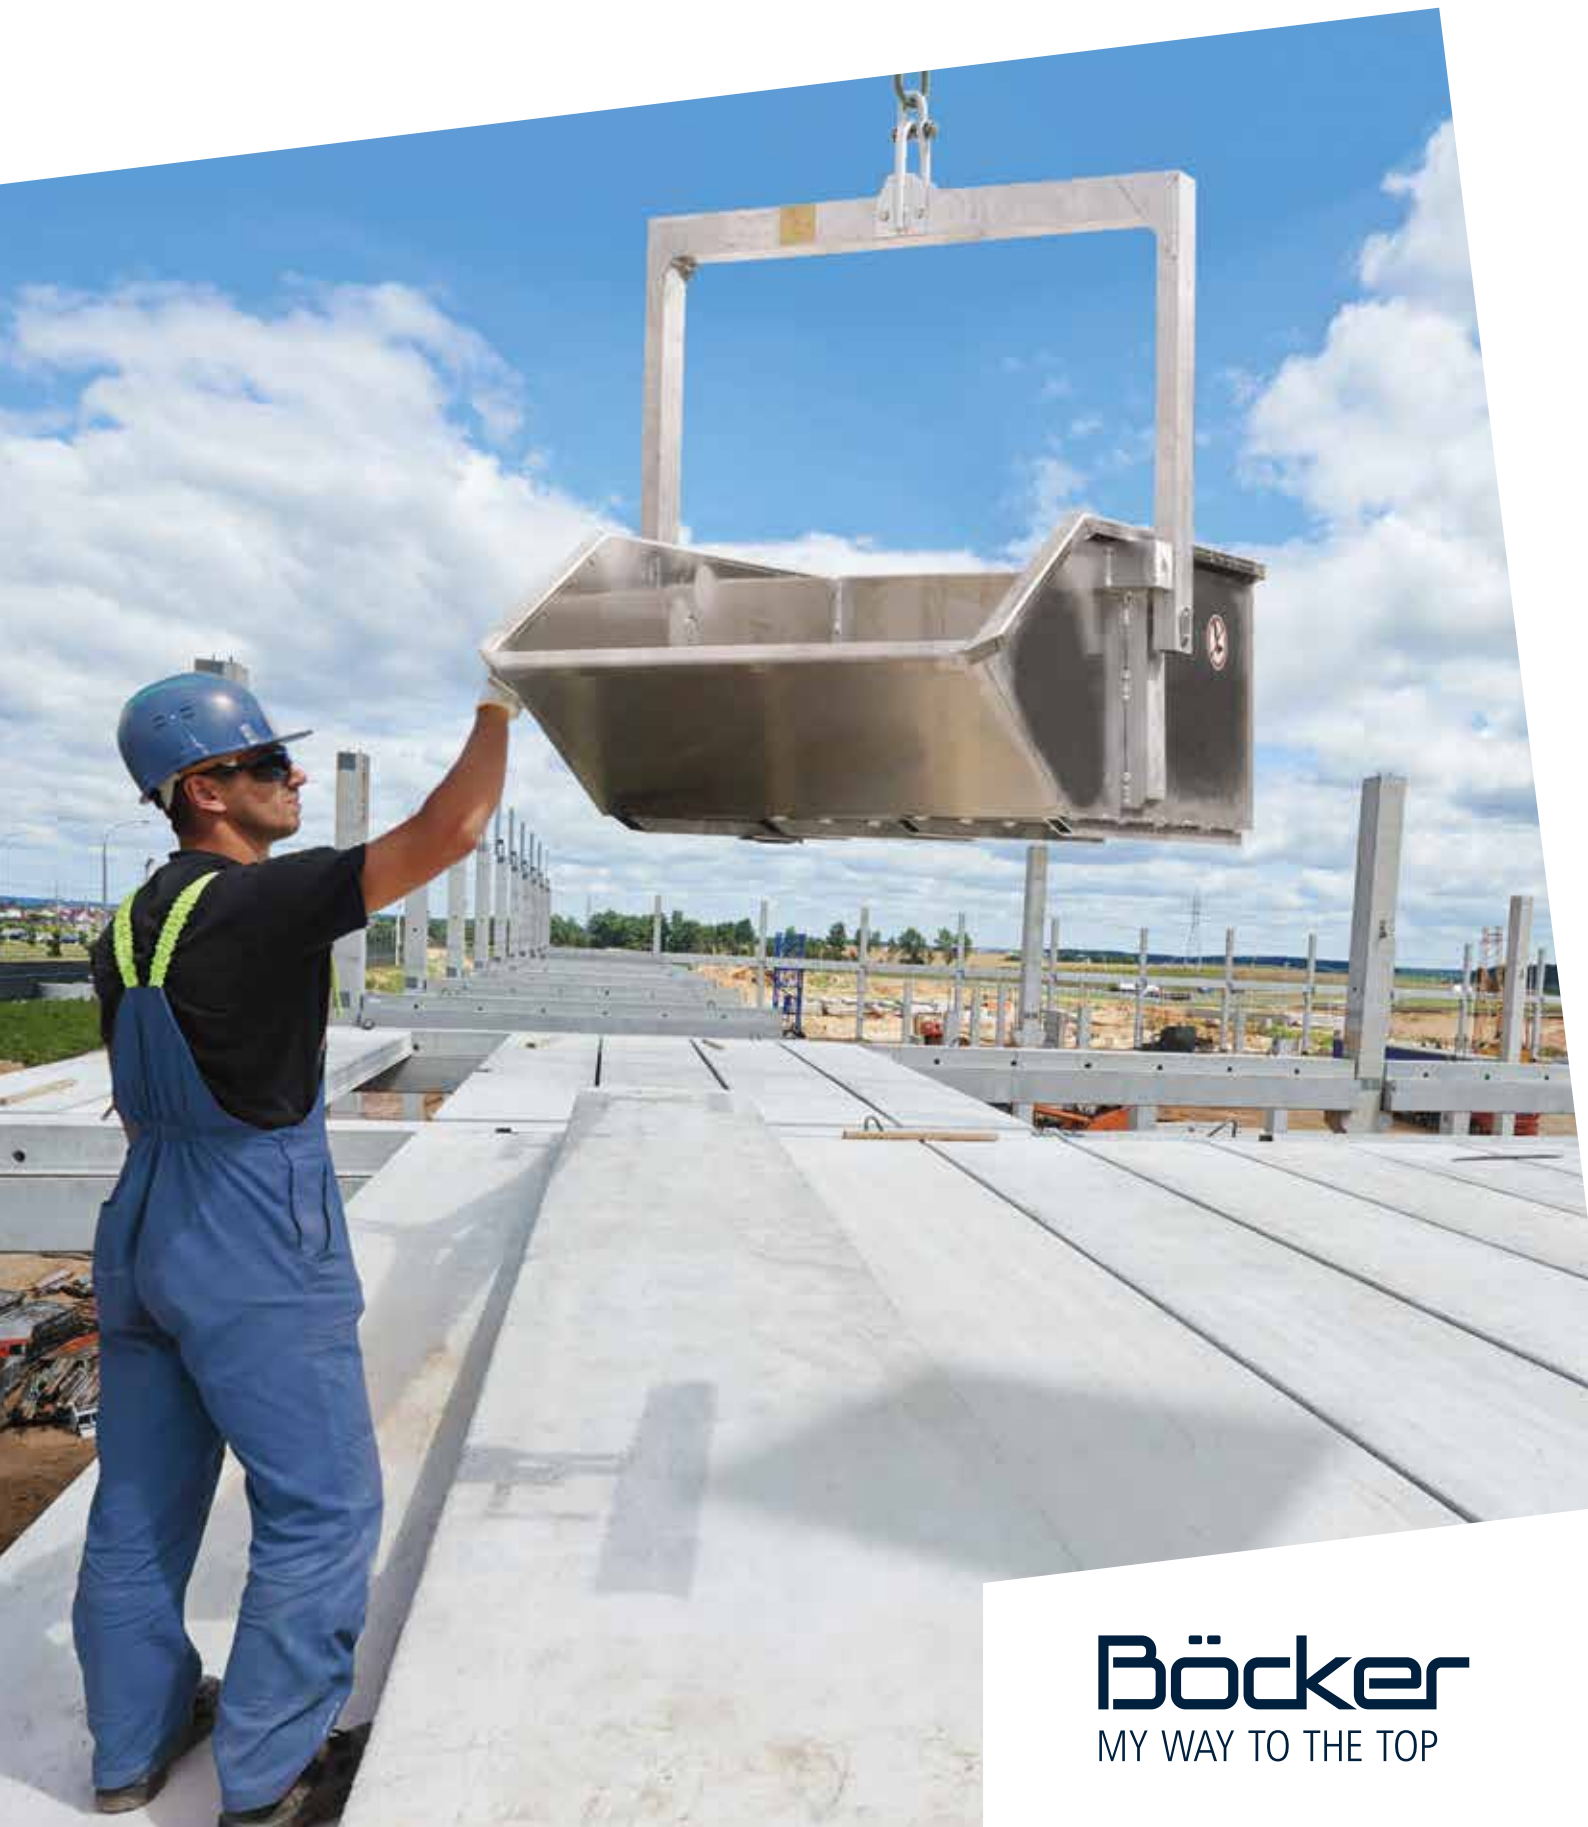

Böcker
MY WAY TO THE TOP

Platforms and Roof Stands



Aluminium Roof Tile Platform DZV 400 for Cranes

Load capacity	400 kg*
Net weight	39 kg
Transport width	1,350 mm
Transport length	1,450 mm
Transport height	210 mm
Loading area size	1,290 x 850 mm
Roof inclination	up to 50 degrees

*two rows of roof tiles



Aluminium Roof Tile Platform DZV 200 for cranes

Load capacity	200 kg*
Net weight	22 kg
Transport width	950 mm
Transport length	1,350 mm
Transport height	210 mm
Loading area size	1,290 x 415 mm
Roof inclination	up to 50 degrees


*one row of roof tiles



Aluminium Roof Tile Platform DZV 200-F for lifts

- Particularly space-saving transport

Load capacity	200 kg
Net weight	14 kg
Transport width	460 mm
Transport length	1,470 mm
Transport height	340 mm
Loading area size	1,100 x 450 mm
Roof inclination	up to 50 degrees

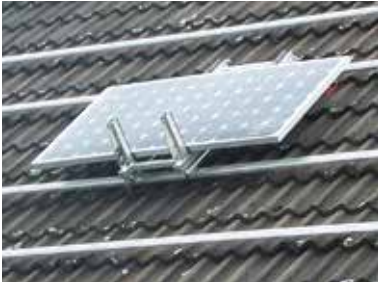

Solar-Panel Platform SMV 150

- Particularly space-saving transport
- Loading area with protective rubber coating
- Area adjustable acc. to module size
- Safety rollers for mounting strips

Load capacity	150 kg
Net weight	12 kg
Loading area size	max. 1,800 x 460 mm



Rolling Platform

- Particularly space-saving transport
- 8-fold adjustment for adaptation to roof inclination
- Special profile rubber rollers
- Including safety hook


Load capacity	200 kg
Net weight	16 kg per pair
Width	420 mm



Roof Stand DS 680 A

- Mounting on the rafters
- Particularly easy to mount
- Particularly space-saving transport

Load capacity	600 kg
Net weight	6.3 kg
Width of load (max.)	800 mm
Roof inclination	20 - 60 degrees

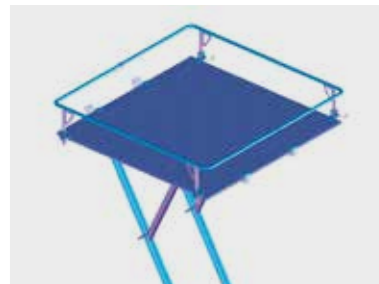

Roof Stand DS 600 A

- Including crane eyes
- Loading area with plug-in guards
- Mounting on the rafters

Load capacity	600 kg
Net weight	65 kg
Loading area	1,700 x 1,700 mm
Roof inclination	20 - 60 degrees

All rights reserved for changes.

Pallet Forks and Tipper Baskets



Aluminium Pallet Fork
PG 600 A

- Balancing the centre of gravity by adjusting the eye hook of the crane
- Including safety chain

Load capacity	600 kg
Net weight	42 kg
Height	1,350 mm
Prong length	854 mm
Prong adjustment	440 - 910 mm



Aluminium Pallet Fork
PG 1000 A

- Balancing the centre of gravity by adjusting the eye hook of the crane
- Including safety chain

Load capacity	1,000 kg
Net weight	66 kg
Height	1,850 mm
Prong length	1,109 mm
Prong adjustment	440 - 910 mm



Aluminium Pallet Fork
PG-A-1800 A

- Balancing the centre of gravity automatically by means of pressure springs
- Including safety chain

Load capacity	1,800 kg
Net weight	80 kg
Height	1,980 mm
Prong length	1,000 mm
Prong adjustment	350 - 935 mm



Aluminium Long Goods
Fork LG 3000

Load capacity	200 kg
Net weight	25 kg
Fork height	758 mm
Fork width	590 mm
Length	3,000 mm



Aluminium Tipper Basket KM 500/315

- Tilting function by means of automatic swivel shackles

Load capacity	500 kg
Net weight	45 kg
Volumetric capacity	315 l
Trough width	890 mm
Trough length	1,253 mm
Trough height	523 mm



Aluminium Tipper Basket KM 1000/625

- Tilting function by means of automatic swivel shackles

Load capacity	1,000 kg
Net weight	70.5 kg
Volumetric capacity	625 l
Trough width	1,000 mm
Trough length	1,460 mm
Trough height	623 mm



Aluminium Tipper Basket KM 1000/1000

- Tilting function by means of automatic swivel shackles

Load capacity	1,000 kg
Net weight	90 kg
Volumetric capacity	1,000 l
Trough width	1,200 mm
Trough length	1,386 mm
Trough height	747 mm



Aluminium Basket 800

- Baskets stackable

Load capacity	230 kg
Net weight	12 kg
Basket width	800 mm
Basket width with stacking lugs	911 mm
Basket length	800 mm
Trough height	300 mm

All rights reserved for changes.

Roof Tile Tongs



Aluminium Roof Tile Tong DZZ 3-600

- For 1, 2 or 3 rows of vertical concrete roof tiles or 2 rows horizontal clay tiles
- Adaptation to package widths by means of marking out
- Including safety guard and automatic changing function

Load capacity	600 kg
Net weight	80 kg
Opening width approx.	300 - 1,200 mm
Depth of immersion	200 mm
Cheek length	1,200 mm



Aluminium Roof Tile Tong DZZ 1-200

- For 1 row of concrete roof tiles and clay tiles, loose, bandaged or wrapped in shrinking foil
- Including swivelling safety basket and automatic changing function

Load capacity	200 kg
Net weight	56 kg
Opening width approx	240 - 500 mm
Depth of immersion	100 mm
Cheek length	1,200 mm



Aluminium Roof Tile Tong DZZ 2-400

- For 1 or 2 rows of concrete roof tiles and clay tiles, loose, bandaged or wrapped in shrinking foil
- Including swivelling safety basket and automatic changing function

Load capacity	400 kg
Net weight	82 kg
Opening width approx.	150 - 900 mm
Depth of immersion	130 mm
Cheek length	1,200 mm



Aluminium Multipurpose Tong MZZ 2-360

- Suitable for loose clay tiles, bandaged or wrapped in shrinking foil
- Including safety net

Load capacity	360 kg
Net weight	45 kg
Opening width approx.	410 - 1,070 mm
Depth of immersion	175 mm
Cheek length	1,200 mm

Various



Aluminium Man Basket KS 200

- Including telescoping facade running wheels

Load capacity crane	min. 410 kg
Net weight	67 kg
Load capacity	200 kg, 2 persons
Length exterior dimensions	1,600 mm
Width exterior dimensions	1,080 mm
Height exterior dimensions	2,315 mm



Warning Sign

- Protection of the construction site as a warning sign
- Stable galvanised design

Net weight	11.5 kg
Width	550 mm
Height	1,000 mm
Erection depth	600 mm
Own advertising	up to 400 x 500 mm

All rights reserved for changes.

Böcker

Böcker Maschinenwerke GmbH

Lippestr. 69-73
DE-59368 Werne
Fon +49 (0)2389 79890
Fax +49 (0)2389 79899000
info@boecker.de

www.boecker.de

Böcker Belgium NV

Boomsesteenweg 101
B-2630 Aartselaar
Fon +32 (0)3 4576241
Fax +32 (0)3 4576242
info@boecker.be

Böcker France SAS

5, rue Maximilien Robespierre
F-93130 Noisy-le-Sec
Fon +33 (0)1 48406767
Fax +33 (0)1 48406768
info@boecker.fr

Böcker Italia srl

Sede Legale:
Corso Porta Nuova 11
IT-37122 Verona (VR)
Sede Operativa/Amministrativa:
Via delle Nazioni 6
IT-37012 Bussolengo (VR)
Fon +39 045 8780399
Fax +39 045 8780420
info@boecker.it

Böcker Nederland B.V.

De Geerden 22
NL-5334 LE Velddriel
Fon +31 (0)418 571444
Fax +31 (0)418 635222
info@boecker.nl

Böcker Schweiz AG

Industriestr. 17
CH-4800 Zofingen
Fon +41 (0)62 7976262
Fax +41 (0)62 7976268
info@boecker.ch

Böcker UK Ltd.

Unit B Grazebrook Park
Hulbert Drive, Dudley
West Midlands UK-DY2 0XW
Fon +44 (0)1384 476580
info@boecker.co.uk