

IXO-Lift 400



SAFE
ALTERNATIVE TO
LADDERS AND
SCAFFOLDS

Technical Data


	400 W	400 S	400 WS
Safe working height [m]	3.97	3.97	3.97
Safe working load [kg]	150	150	150
Max. platform height [m]	1.97	1.97	1.97
Min. platform height [m]	0.97	0.97	0.97
Platform size [m]	0.53 x 0.56	0.53 x 0.56	0.53 x 0.56
Stowed height [m]	1.97	1.97	1.97
Stowed length [m]	1.20	1.20	1.20
Stowed width [m]	0.73	0.73	0.73
Max. length with stabilisers out [m]	-	1.50	1.50
Max. width with stabilisers out [m]	-	1.17	1.17
Classification	indoor		indoor and outdoor
Total weight [kg]	228	140	239
Compliance	Machinery Directive 2006/42/EC, EN 280/2013, EN1004/2004 standards		

The IXO-Lift work platform is a simple and safe alternative to ladders or scaffolding for heights up to 4m. Thanks to the ease of use and compact dimensions of the lift, it can comfortably carry one person to the operating site. The man basket is raised up by means of a pneumatic spring and uses the operator's own weight to lower itself again.

The pneumatic spring makes it environmentally friendly. It does not even require batteries or other external electricity sources, meaning it can be used in wet areas such as vehicle washing bays. An automatic wheel break ensures that the lifting platform is secure during use.

Adjustable work platform

- Simple and safe to operate
- Safe alternative to ladders
- Compact dimensions and low tare weight
- Can be operated and manoeuvred by one person
- Automatic wheel brake during use
- Propelled by a pneumatic spring
- Environmentally friendly because it does not use hydraulic oil, batteries or external electricity sources
- Optional ATEX category IIC T6 Gb classification for use in zones 1 and 21
- Stainless steel model (AISI 316) available on request
- Fulfils the requirements for funding by BG Bau

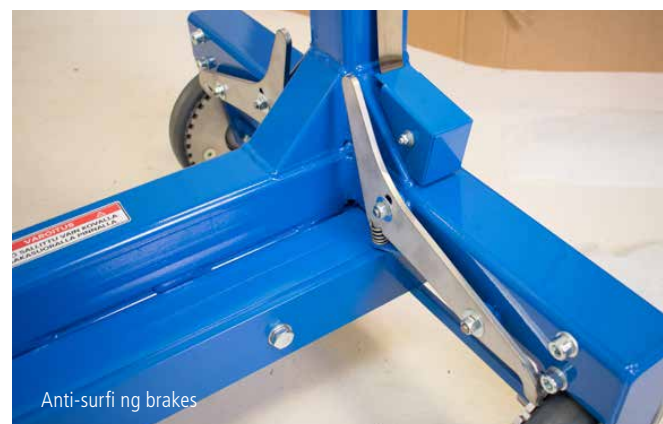

Böcker

www.boecker.de

Böcker Maschinenwerke GmbH

Lippestr. 69-73
59368 Werne

Fon +49 2389 79890
Fax +49 2389 79899000
info@boecker.de